

LUMINES Lighting ILEDO


Linear LED Luminaire



ILEDO
by  LUMINES®
LIGHTING

LUMINES Lighting Linear LED Luminaire is dedicated mainly for indoor use. It is used as a main and decorative light source. Due to its minimalistic design, it allows for various interior arrangements.

Exact length of the luminaire [mm]	615
Fixture height [mm]	30
Fixture depth [mm]	43
Input voltage	220-240V AC
Useful luminous flux [lm] in a 120° cone	1810
Color temperature CCT [K]	4000
Color	White lacquered

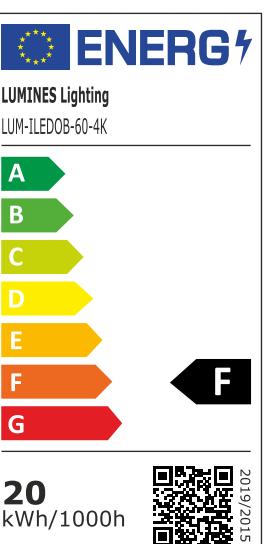

SET INCLUDES

LED luminaire	Aluminum
Light source	Samsung LED
Diffuser material	PMMA
Diffuser color	Milk
Set of suspensions	
Line	1250 mm x 1,2 mm
Cable lock	M4 9x29 nickel plated
Nipple	M10x1 nickel plated
Ceiling mounting bracket	15x15 M10x1 nickel


PARAMETERS

Symbol	LUM-ILED0B-60-4K
Index	26-0000-29
Weight with packaging [kg]	1,96
Power on mode [W]	20
Energy efficiency class	F
Standby power [W]	0
Power factor	0,89
Total luminous flux [lm]	2230
Luminous efficiency [lm / W]	111
Peak light [cd / klm]	420,11
CRI Ra	>80
R9	11

Chromaticity Coordinates (x)	0,3827
Chromaticity Coordinates (y)	0,3800
Radiation angle (°)	99
Color uniformity in MacAdam ellipses	<4 degrees
Strobe Effect Indicator (SVM)	0,04
Flicker Index (Pst LM)	0,3
Lighting maintenance factor [%]	96
Dimmable	Not
IP	20
Lifespan L70B50	>54000
Guarantee	60 months



Power Factor PF ≥0,9	Voltage 220-240 V 50-60 Hz	Power 20 W	CRI Ra ≥80	IP protection IP20	Beam angle 	Lifespan  54 000 h	off on  25 000	60%  0,02 s	Starting time <0,02 s	Temperature range  +60 °C -20	
-----------------------------------	---	-------------------------	-------------------------	------------------------------	---	--	---	---	---------------------------------------	--	---

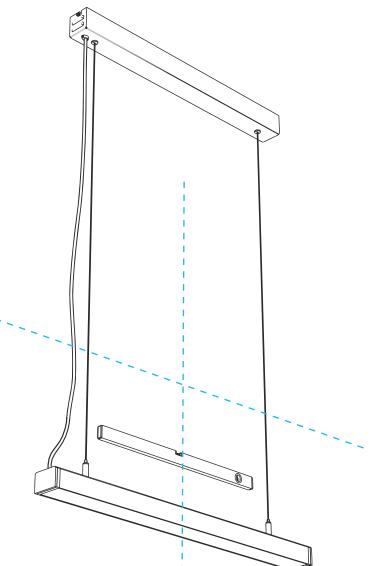

How to install?



Scan the QR code to
see the instructional video

